

BOTTOM MOUNT SLIM LINE SF-49

FEATURES / BENEFITS

•DIGITAL TEMPERATURE CONTROL SYSTEM

Provides precise and constant temperature. This level of precision allows food products to remain fresh over an extended period of time.

•HIGH-TECH MONITOR

The unit will beep if the door has been opened for more than 30 seconds. The monitor digitally displays the present temperature and current status of the refrigerator. Users can easily change the temperature by adjusting the thermostat.

•LEFT HINGED MODEL AVAILABLE

•AUTOMATIC EVAPORATOR FAN MOTOR DELAYS

SKIPIO's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

•AUTOMATIC EVAPORATOR FAN MOTOR DELAYS

Through stopping the evaporator fan when the refrigerator door opens, the circulation of hot, moist air into the refrigerator is prevented. This increases energy efficiency and lengthens the life of the compressor.

•HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

•MAGNETIC DOOR GASKETS

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

•ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

•BOTTOM MOUNT COMPRESSOR UNITS

SKIPIO's bottom mount compressor allows easier access for service and extra storage space above. In addition, the lower area provides a cooler and less greasy operating environment which results in reduced compressor running time.




Model	Doors	Capacity (Liters)	Shelves	Compressor (HP)	Amps (A)	Net Weight (Kg)	L X D X H (mm)
SF-49	2	1148	6	3/4	5	190	1382x700x2113

BOTTOM MOUNT SLIM LINE SF-49


Model: SF-49

SPEC SHEET	SF-49
Classification	Freezer
Cabinet Dimension (WxDxH mm)	1382x700x2113
Capacity (Liters)	1148
Inner Temperature	-21°C~-12°C
Doors	2
Number of Shelves	6
Refrigent	R-404a
Compressor (Hp)	3/4
Cooling Type	Fan cooling type
Insulation Type	Polyurethane / Cyclopentane + CFC Free
Temperature Control Type	Digital
Amps (A)	5
Voltage (V/Hz/Ph)	240V 50Hz 1Ph
Power (W)	564
Weight (Kg)	190

PLAN VIEW (unit: mm)

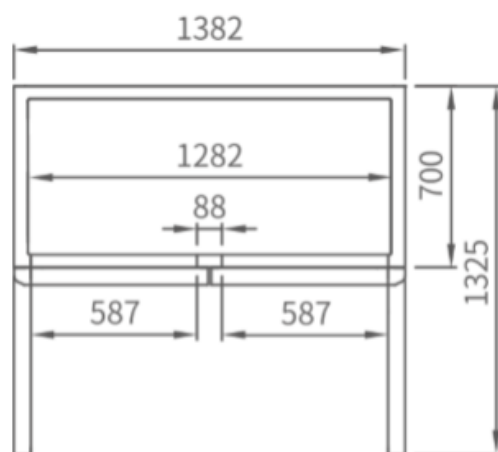

TOP VIEW

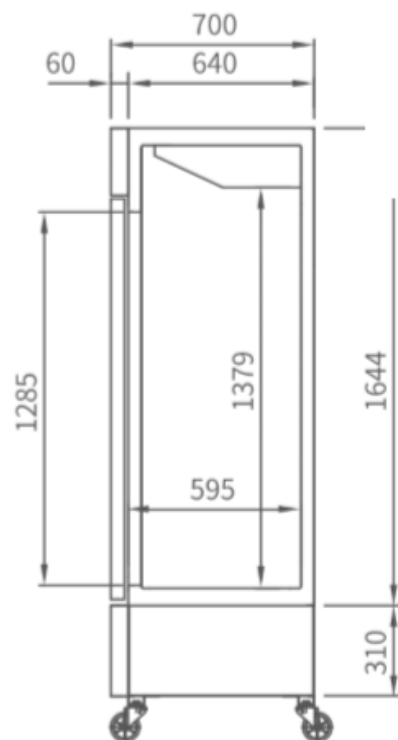

SIDE VIEW

WARRANTY 2 YEARS
PARTS & LABOUR